



MODEL 1101-1129-RS/NRS

Replaced first by 3529-RS/NRS, then by 3629-RS/NRS (Chassis use) and 3729-RS/NRS (Flatbed Trailer use)

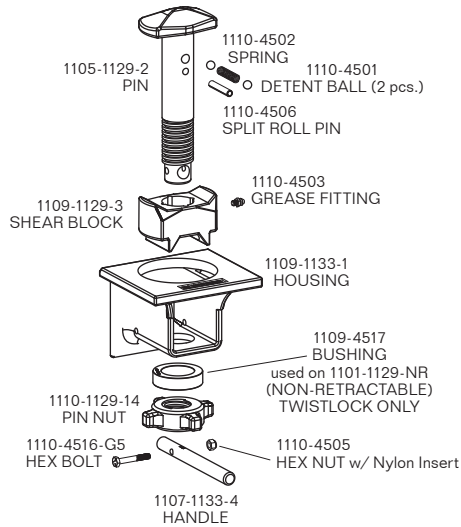


MODEL 1101-1133-R/NR

Replaced first by 3133-R/NR, then by 3533-R/NR, then by 3633-R/NR (Chassis use) and 3733-R/NR (Flatbed Trailer use)

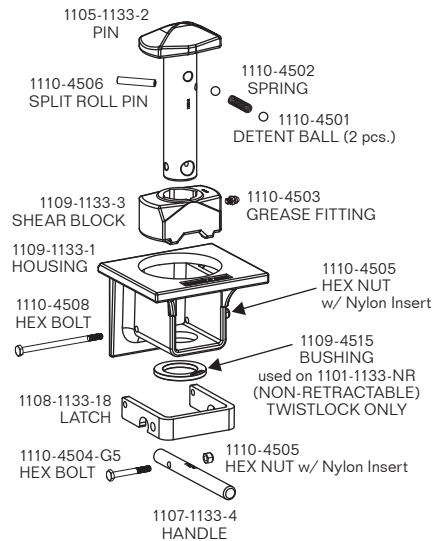


MODEL 1101-1217-L/R

Replaced by 3817-L/R

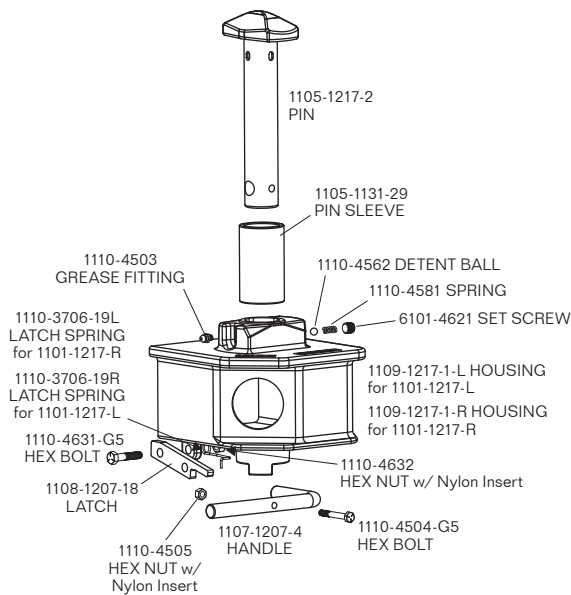


MODEL 1101-3133-R/NR

Replaced first by 3533-R/NR, then by 3633-R/NR (Chassis use) and 3733-R/NR (Flatbed Trailer use)

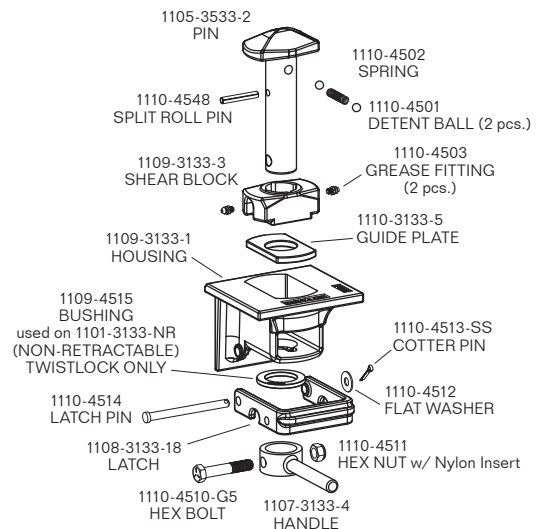


MODEL 1101-3137-R/NR

Replaced first by 3637-R/NR, then by 3837-R/NR

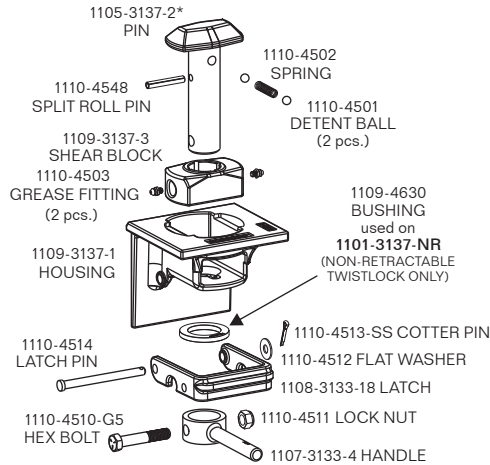


***PLEASE NOTE:** When replacing Pin, use **1105-3637-INNER-H** w/ Guide Plate:




MODEL 1101-3187-R/NR

Replaced first by 3189-R/NR, then by 3190-R/NR, then by 3590-R/NR, then by 3690-R/NR

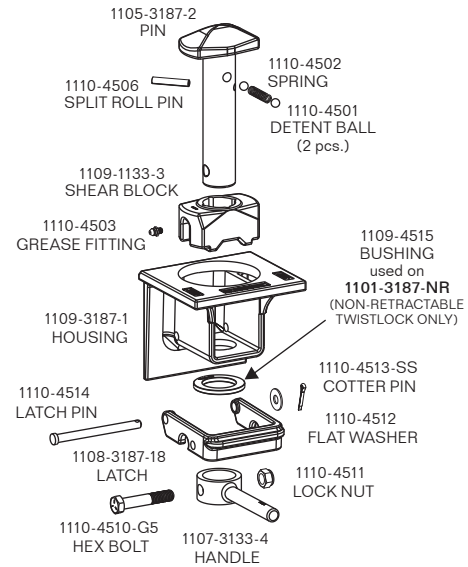


MODEL 1101-3189-R/NR

Replaced first by 3190-R/NR, then by 3590-R/NR, then by 3690-R/NR

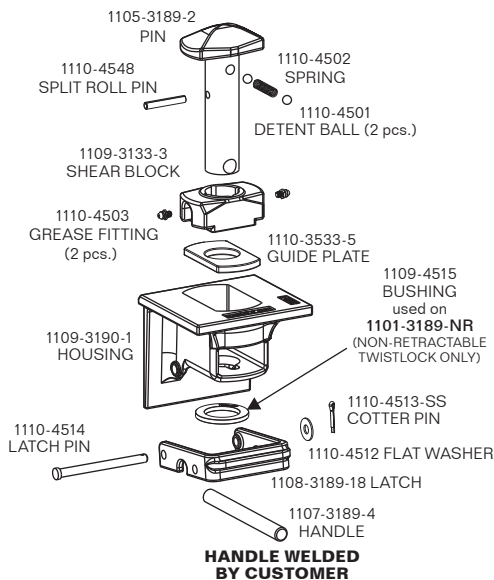


MODEL 1101-3190-R/NR

Replaced first by 3590-R/NR, then by 3690-R/NR

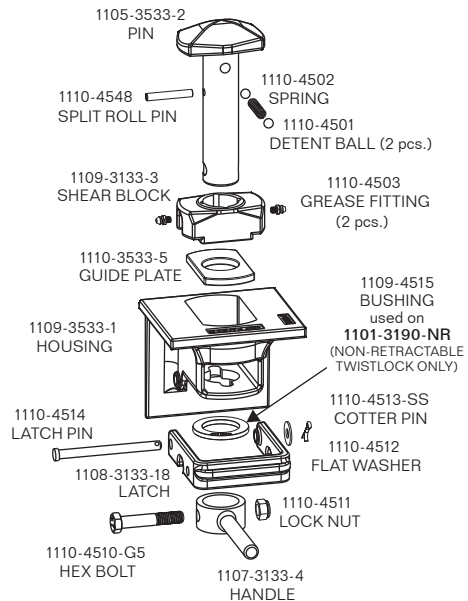


MODEL 1101-3423-R/NR

Replaced first by 3643-R/NR, then by 3843-R/NR

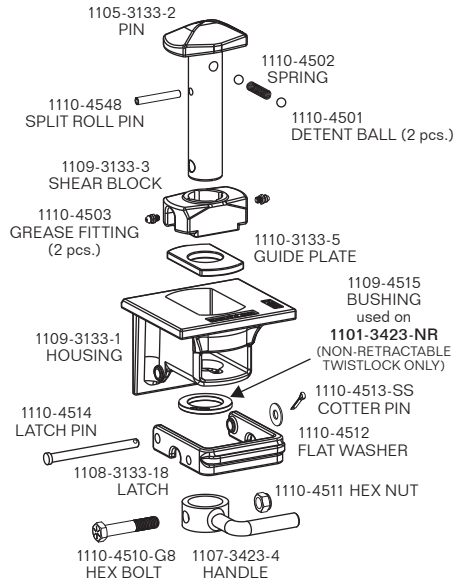


MODEL 1101-3524-NR

Replaced by 3624-NR

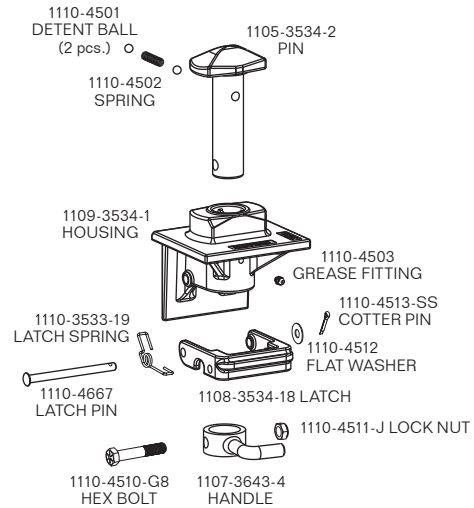


MODEL 1101-3529-RS/NRS

Replaced by 3629-RS/NRS (Chassis use)
& 3729-RS/NRS (Flatbed Trailer use)

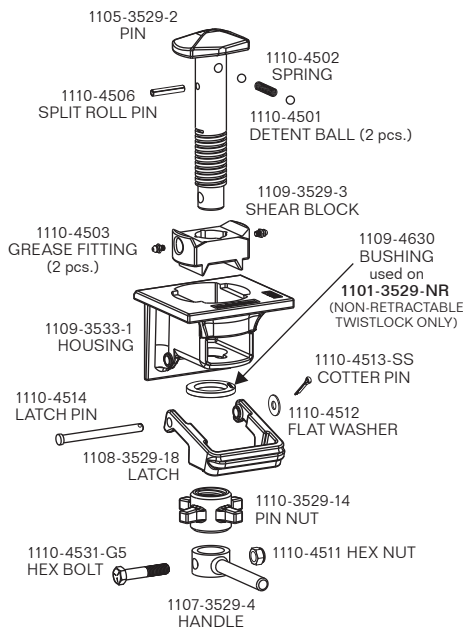


MODEL 1101-3533-R/NR

Replaced by 3633-R/NR

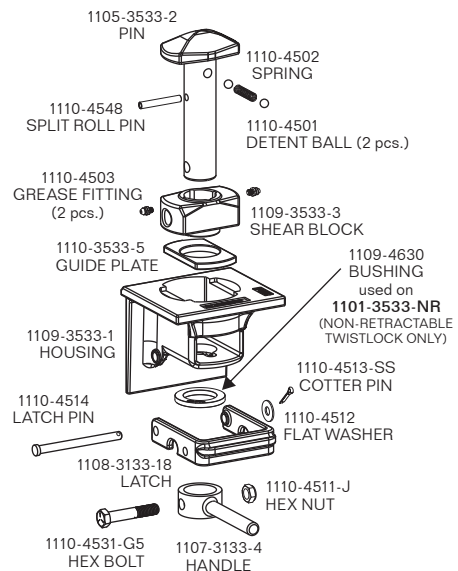


MODEL 1101-3534-NR

Replaced by 3634-NR

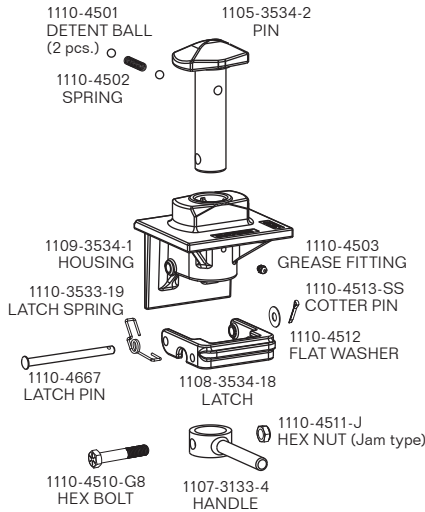


MODEL 1101-3590-R/NR

Replaced by 3690-R/NR

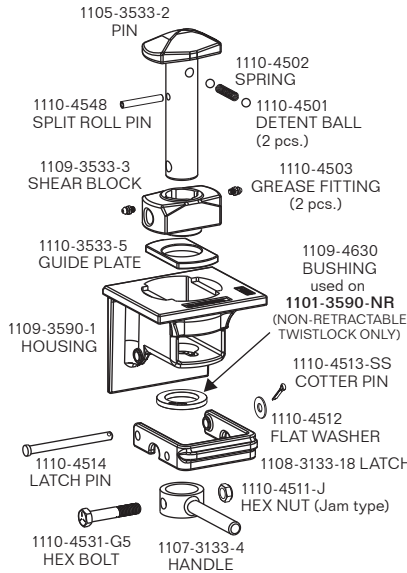


MODEL 1101-3593-NR

Replaced by 3693-NR

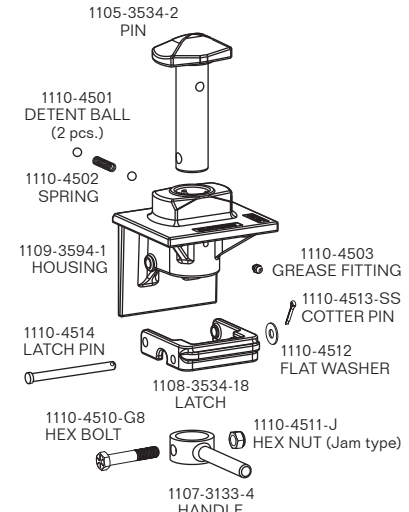

MODEL 1101-3637-R/NR

Replaced by 3837-R/NR

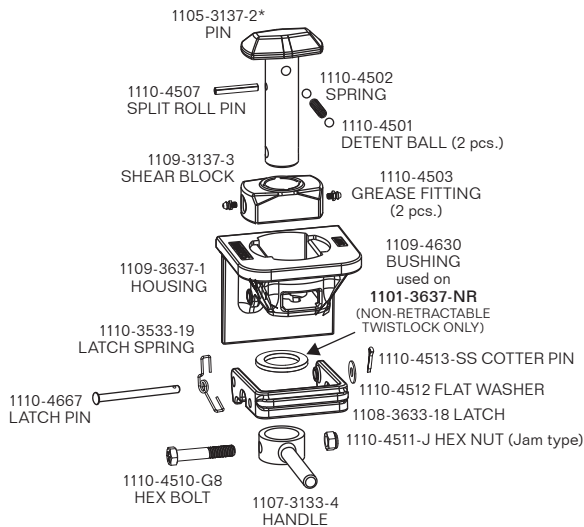

***PLEASE NOTE:** When replacing Pin, use 1105-3637-INNER-H w/ Guide Plate:




1105-3637-INNER-H contains:

- 1105-3637-2-H PIN
- 1110-4501 DETENT BALL (2 pcs.)
- 1110-4502 DETENT SPRING
- 1110-4548 SPLIT ROLL PIN
- 1109-3637-3-H SHEAR BLOCK
- 1110-4503 GREASE FITTING (2 pcs.)
- 1110-3637-5-H GUIDE PLATE

MODEL 1101-3643-R/NR

Replaced by 3843-R/NR

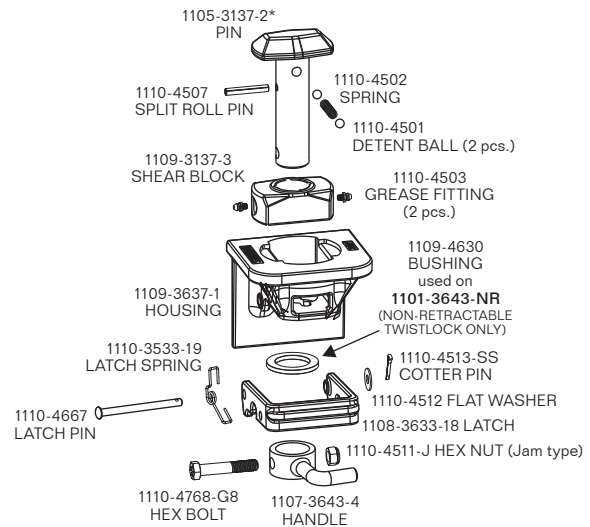

***PLEASE NOTE:** When replacing Pin, use 1105-3637-INNER-H w/ Guide Plate:



1105-3637-INNER-H contains:


- 1105-3637-2-H PIN
- 1110-4501 DETENT BALL (2 pcs.)
- 1110-4502 DETENT SPRING
- 1110-4548 SPLIT ROLL PIN
- 1109-3637-3-H SHEAR BLOCK
- 1110-4503 GREASE FITTING (2 pcs.)
- 1110-3637-5-H GUIDE PLATE

MODEL 1101-3600-HA-KIT

HEIGHT-ADJUSTABLE TWISTLOCK* w/ T-HANDLE (no Latch)

Replaced by 3600-HA-WL-KIT (w/ T-Handle & Latch)

FINISH: PRIMER **WEIGHT:** 45.6 LBS / 20.68 Kg

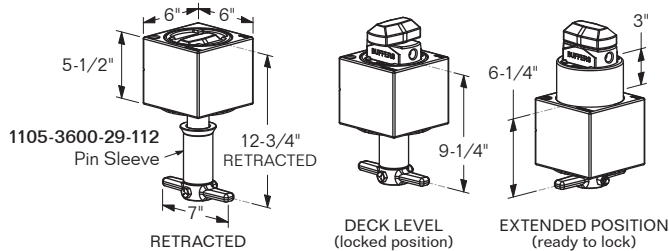


MODEL 1101-3600-HA-9-KIT

HEIGHT-ADJUSTABLE TWISTLOCK* w/ HANDLE EXTENSION TUBE & T-HANDLE (no Latch)

Replaced by 3600-HA-9-WL-KIT (w/ 9" Square Extension Tube, T-Handle & Latch)

FINISH: PRIMER **WEIGHT:** 50.15 LBS / 22.75 Kg

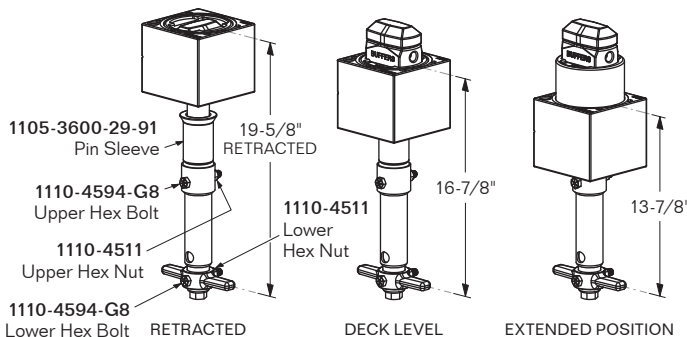


MODEL 1101-3600-HA-9-NH-KIT

HEIGHT-ADJUSTABLE TWISTLOCK* w/ EXTENSION TUBE ONLY (no handle or latch)

Replaced by 3600-HA-9-NH-WL-KIT (w/ 9" Square Extension Tube & Latch - no handle)

FINISH: PRIMER **WEIGHT:** 48.6 LBS / 22.04 Kg

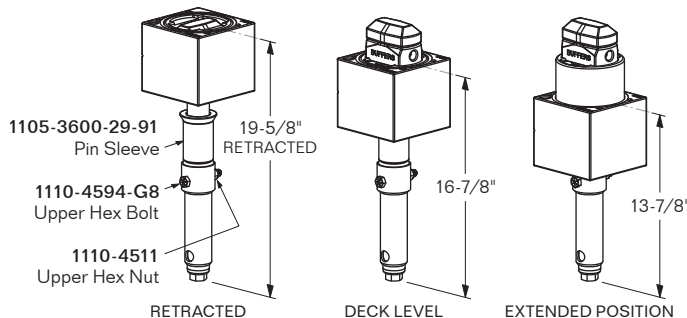

IMPORTANT NOTICE

***Canadian Customers:** In order to meet Canadian road regulations, a secondary lock is **REQUIRED** to ensure the 1101-3600-HA Twistlock (older style w/ round handle extension) does not rotate to the unlocked position:

See table below for Latch retrofit guide:


Twistlock Assembly	Components Needed to Retrofit Latch Assy.**
1101-3600-HA-KIT	1108-3600-HA-18-SL Latch (for handle on round tube)
1101-3600-HA-9-KIT & 1101-3600-HA-9-NH-KIT	1108-3600-HA-18-SL-SQ-KIT Latch (for handle on sq. tube), 1105-3600-INNER (w/ 2 handle bolt holes**), 1107-3600-4-9-SQ Handle, 1110-4510-G8 Hex Bolt & 1110-4511-J Hex Jam Nut

** Only needed for longitudinal latch operation. Can use existing INNER if transversal latch operation works.


*** **NOTE:** Retrofit Installation Guide with detailed, step-by-step instructions is available; ask your Sales Representative.

COMPONENTS USED ON 1101-3600-HA TWISTLOCKS (old style w/ round handle extension):

MODEL 1107-3600-4 T-Handle




FINISH: PRIMER
WEIGHT: 1.4 LBS / 0.64 Kg



MODEL 1107-3600-4-9 Handle Extension Tube

FINISH: ZINC-PLATED
WEIGHT: 4.35 LBS / 1.97 Kg



MODEL 1105-3600-INNER Pin Assembly (older design w/ 1 Handle Bolt Hole)

FINISH: PRIMER
WEIGHT: 16.45 LBS / 7.46 Kg



PATENT PENDING

